

# HF33F

# SUBMINIATURE INTERMEDIATE POWER RELAY



File No.:E134517



File No.:125661



File No.:CQC12002076530



## Features

- Provide 5A 250VAC to meet 300000 switching capability specifications
- Creepage distance: 8mm (coil & contacts)
- Clearance distance: NO type 4.5mm, NC type 4mm
- 1 Form A、1 Form B and 1 Form C configurations
- Subminiature, standard PCB layout
- Plastic sealed and flux proofed types available
- UL insulation system: Class F
- Product in accordance to IEC 60335-1 available

RoHS compliant

## CONTACT DATA

Contact arrangement	1A, 1C, 1B			
Contact resistance	100mΩ max.(at 1A 6VDC)			
Contact material	AgSnO <sub>2</sub> , AgNi, AgCdO			
Contact rating (Res. load)	1A	1C		1B
		NO	NC	NC
	5A 250VAC 5A 30VDC 10A 125VAC	5A 250VAC 5A 30VDC 10A 125VAC	3A 250VAC 3A 30VDC	5A 250VAC
Max. switching current	10A	3A	5A	
Max. switching power	1250VA / 150W	750VA	1250VA	
Max. switching voltage	250VAC / 30VDC		250VAC	
Mechanical endurance	5 x 10 <sup>6</sup> ops			
Electrical endurance	H type: 3 x 10 <sup>5</sup> ops (5A 250VAC, Resistive load, Room temp., 1s on 1s off) Z type: 1 x 10 <sup>5</sup> ops (NO:5A/NC:3A 250VAC, Resistive load, Room temp., 1.5s on 1.5s off) D type: 1 x 10 <sup>4</sup> ops (5A 250VAC, Resistive load, Room temp., 1s on 1s off)			

Notes: 1) The data shown above are initial values.

## CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	4000VAC 1min
	Between open contacts	1000VAC 1min
Operate time (at rated. volt.)	8ms max.	
Release time (at rated. volt.)	5ms max.	
Ambient operating temperature	-40°C to 70°C	
Humidity	5% to 85% RH	
Shock resistance	Functional	98m/s <sup>2</sup>
	Destructive	980m/s <sup>2</sup>
Vibration resistance	10Hz to 55Hz 1.5mm DA	
Termination	PCB	
Unit weight	Approx. 7g	
Construction	Plastic sealed, Flux proofed	

Notes: 1) The data shown above are initial values.

2) For working environment temperature of 105°C, please contact Hongfa.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2020 Rev. 1.01

## COIL

Coil power	Standard: Approx. 450mW; Sensitive: Approx. 200mW
------------	--

## COIL DATA

at 23°C

### Standard Type

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Voltage VDC *	Coil Resistance Ω
3	2.25	0.15	3.9	20 x (1±10%)
5	3.75	0.25	6.5	55 x (1±10%)
6	4.50	0.30	7.8	80 x (1±10%)
9	6.75	0.45	11.7	180 x (1±10%)
12	9.00	0.60	15.6	320 x (1±10%)
18	13.5	0.90	23.4	720 x (1±10%)
24	18.0	1.20	31.2	1280 x (1±10%)
48	36.0	2.40	62.4	5120 x (1±10%)

### Sensitive type (Only for 1 Form A)

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Voltage VDC *	Coil Resistance Ω
3	2.25	0.15	4.5	45 x (1±10%)
5	3.75	0.25	7.5	125 x (1±10%)
6	4.50	0.30	9.0	180 x (1±10%)
9	6.75	0.45	13.5	400 x (1±10%)
12	9.00	0.60	18.0	720 x (1±10%)
18	13.5	0.90	27.0	1600 x (1±10%)
24	18.0	1.20	36.0	2800 x (1±10%)
48	36.0	2.40	72.0	11520 x (1±10%)

Notes: \*Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

## SAFETY APPROVAL RATINGS

UL/CUL	1 Form A	AgCdO	5A 250VAC/30VDC at 40°C 8A 250VAC at 40°C 10A 125VAC at 40°C 10A 277VAC COSØ=0.4 at 40°C 1/10HP 125VAC, 1/6HP 250VAC at 40°C	
		AgNi	5A 250VAC/30VDC at 70°C 8A 250VAC at 70°C 10A 125VAC at 70°C 10A 277VAC COSØ=0.4 at 70°C 1/10HP 125VAC, 1/6HP 250VAC at 70°C	
		AgSnO <sub>2</sub>	5A 250VAC/30VDC at 70°C 10A 125VAC at 70°C	
	1 Form C	AgCdO	NO:5A 250VAC/30VDC at 40°C NC:3A 250VAC/30VDC at 40°C	
		AgNi AgSnO <sub>2</sub>	NO:5A 250VAC/30VDC at 70°C NC:3A 250VAC/30VDC at 70°C	
VDE	1 Form A	AgNi	5A 250VAC at 85°C	
		AgCdO	5A 250VAC at 70°C	
		AgSnO <sub>2</sub>	5A 250VAC at 70°C	
	1 Form C	AgCdO AgNi AgSnO <sub>2</sub>	NO: 5A 250VAC at 70°C* NC: 3A 250VAC at 70°C*	
CQC	1 Form A	AgNi AgCdO AgSnO <sub>2</sub>	5A 250VAC/30VDC at 85°C NO: 5A 250VAC at 70°C NC: 5A 250VAC at 70°C	
		1 Form C	AgNi AgCdO AgSnO <sub>2</sub>	NO:5A 250VAC/30VDC at 85°C NC:3A 250VAC/30VDC at 85°C
	1 Form B		AgNi AgCdO AgSnO <sub>2</sub>	NC:5A 250VAC at 40°C

- Notes:** 1) \*The vent hole is kept open during load approval;  
2) All values unspecified are at room temperature.  
3) Only typical loads are listed above. Other load specifications can be available upon request.

## ORDERING INFORMATION

Type	HF33F / 012 -H S L 3 F (XXX)
Coil voltage	3, 5, 6, 9, 12, 18, 24, 48VDC
Contact arrangement	H: 1 Form A      Z: 1 Form C D: 1 Form B
Construction <sup>1)</sup>	S: Plastic sealed      Nil: Flux proofed
Coil power	L: Sensitive (Only for 1 Form A)      Nil: Standard
Contact material	T: AgSnO <sub>2</sub> 3: AgNi      Nil: AgCdO
Insulation standard	F: Class F
Special code <sup>3)</sup>	XXX: Customer special requirement      Nil: Standard

- Notes:** 1) Under the ambience with dangerous gas like H<sub>2</sub>S, SO<sub>2</sub> or NO<sub>2</sub>, plastic sealed type is recommended; Please test the relay in real applications. If the ambience allows, flux proofed type is preferentially recommended.  
2) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.  
3) The customer special requirement express as special code after evaluating by Hongfa.  
4) Two packing methods available: paper box package, tube package, Standard tube packing length is 553mm. Any special requirement needed, please contact us for more details.  
5) For products that should meet the explosion-proof requirements of "IEC 60079 series", please note [Ex] after the specification while placing orders. Not all products have explosion-proof certification, so please contact us if necessary, in order to select the suitable products.

# OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT




Unit: mm

## Outline Dimensions




## Wiring Diagram (Bottom view)

## PCB Layout (Bottom view)




### 1 Form A

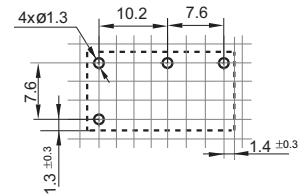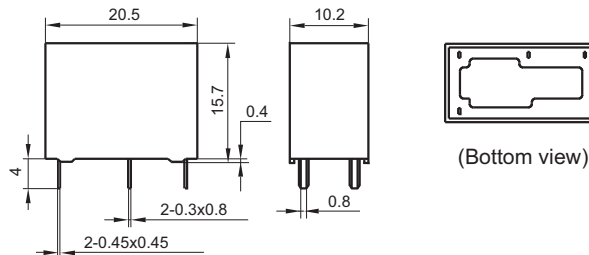




### 1 Form C

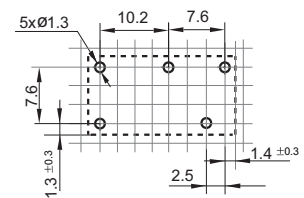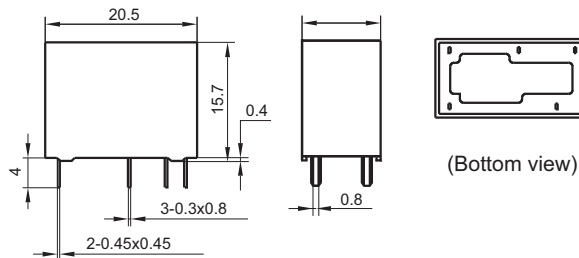

### 1 Form B (With 5 terminal)

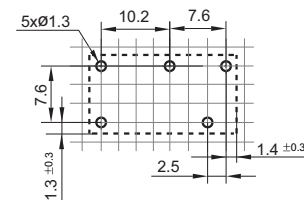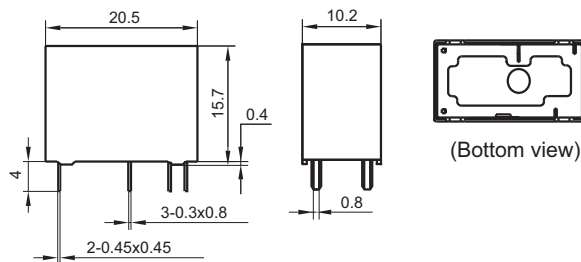

### 1 Form B (With 4 terminal)

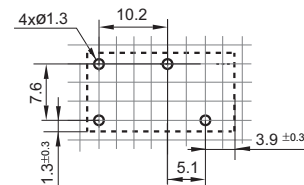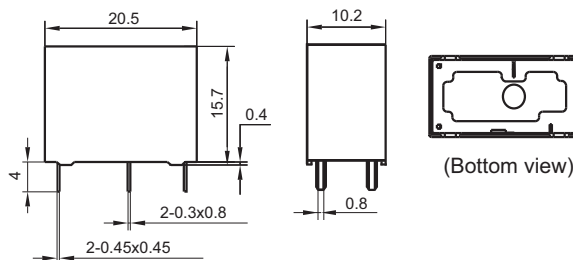


Remark:1) \* The additional tin top is max. 1mm.


- 2) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1$ mm, tolerance should be  $\pm 0.2$ mm; outline dimension  $> 1$ mm and  $\leq 5$ mm, tolerance should be  $\pm 0.3$ mm; outline dimension  $> 5$ mm, tolerance should be  $\pm 0.4$ mm.
- 3) The tolerance without indicating for PCB layout is always  $\pm 0.1$ mm.
- 4) The width of the gridding is 2.54mm.

## CHARACTERISTIC CURVES


MAXIMUM SWITCHING POWER

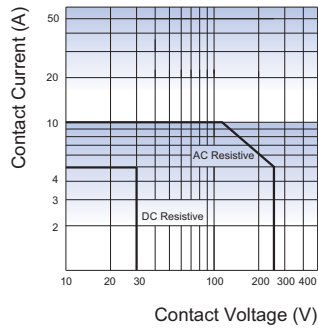

ENDURANCE CURVE

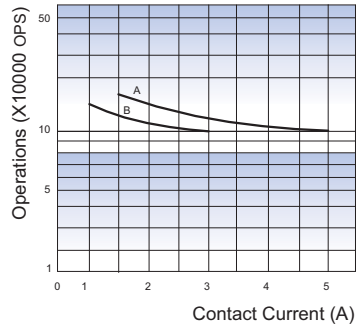

COIL TEMPERATURE RISE

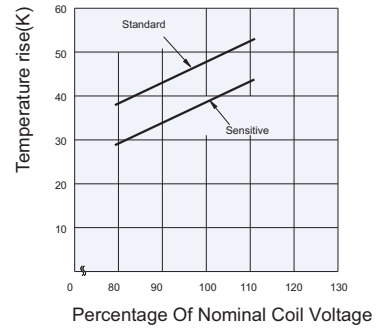

**Notes:**

1. Curve A: NO contact  
Curve B: NC contact

**2. Test conditions:**

Curve A: NO, Resistive load, Room temp.,  
flux proofed, 250VAC/30VDC, 1s on 9s off  
Curve B: NC, Resistive load, Room temp.,  
flux proofed, 250VAC/30VDC, 1s on 9s off

**Notes:**

Standard: 5A at 70°C  
Sensitive: 5A at 70°C  
Mounting distance: 10mm

**Disclaimer**

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.